
M3


Single handle high profile lavatory faucet

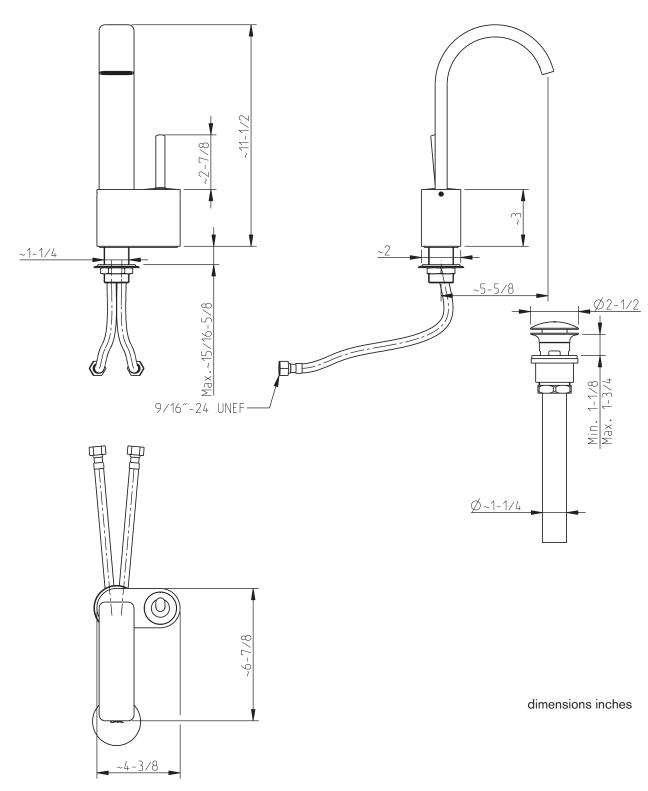

CIFIAL

www.cifial.pt | cifial@cifial.pt cifial@cifial.es www.cifial.co.uk | sales@cifial.co.uk www.cifialusa.com www.cifial.pl | cifial@cifial.pl

code: 231 100 xxx

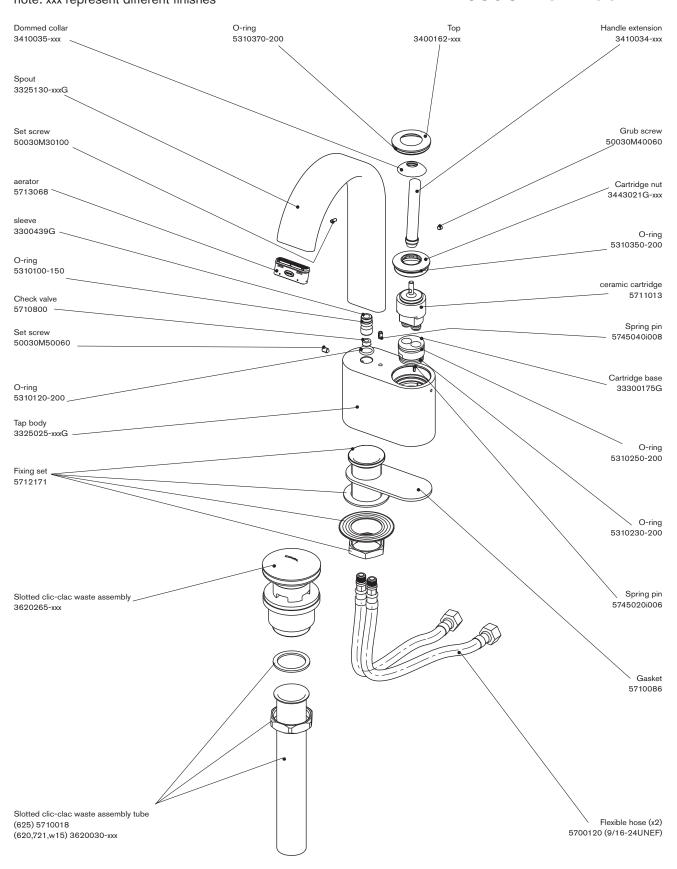



www.cifial.pt | cifial@cifial.pt cifial@cifial.es www.cifial.co.uk | sales@cifial.co.uk www.cifialusa.com www.cifial.pl | cifial@cifial.pl

code: 231 100 xxx

EN

maintenance or replacement of check-valve


Remove the spout from the tap body, unscrewing its set screw. The check valve is installed and available in the spout base.

mounting options


To change position of the spout, start desassembling as above mentioned. Turn the tap body 180°, disassembling the cartridge as per technical drawing, turn it 180°, turn the cover 180° and reassemble all components again.

disassembling cartridge


hexagonal accessory (supplied) wrench (not supplied)



spout on the left side option (preassembled at factory)



spout on the right side option





www.cifial.pt | cifial@cifial.pt cifial@cifial.es www.cifial.co.uk | sales@cifial.co.uk www.cifialusa.com www.cifial.pl | cifial@cifial.pl